

□ 3950400 Safety station with eye/face wash

Application.

Emergency shower and eye/face wash, built in conformity to UNI 9608-1993 and ANSI/ISEA Z358.1-2009. Where the eyes or body of any person may be exposed to injurious or corrosive materials, suitable facilities for quick drenching or flushing of the eyes and body shall be provided within the work area for immediate emergency use. The facilities shall be in unobstructed and accessible locations that require no more than 10 seconds for the injured person to reach.

Description.

Unit with 18,7"x26,5" (mm. 475x675) platform grate for free-standing installation. Quick opening valve with automatic drain type "Freeze-stop", operated through walk-on treadle, allowing the emptying of water from pipes after use.

Eye-facewash assembly.

ABS bowl, with pipe fitting for water outlet. Eye/face wash system consisting of one chrome plated copper face wash ring and two nozzles in chromed ABS, adjustable in two functions and with a stainless steel filtering mesh: self-adjusting 2,2 gpm (8,4 lpm) eye wash and 3,2 gpm (12,1 lpm) face wash regulators.

Shower assembly.

ABS shower head, with break flow system. 1.¼" chrome plated brass stay-open ball valve for shower, operated through a galvanized steel handle.

Pipes and fittings.


1.¼" schedule 40 carbon steel pipes and fittings, hot-dipped galvanized UNI EN 10240 A.1

Supply.

Side inlet G 1.¼" female.

Quality assurance.

All factory pre-assembled and water tested prior to shipment.

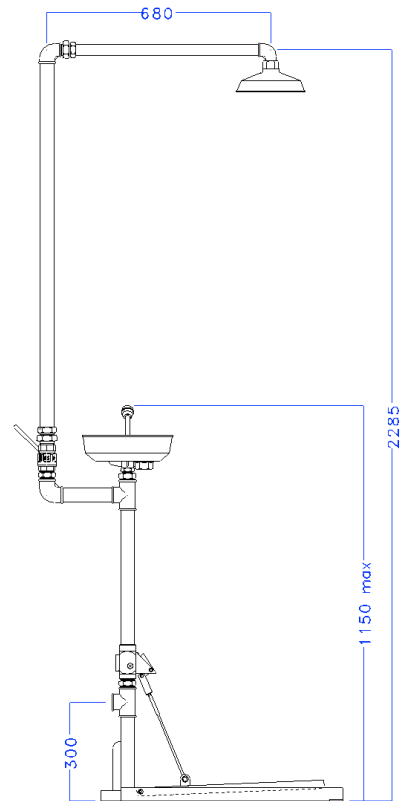

Painting.

Externally coated with thermosetting powder coating based on saturated carboxylated polyester resins and proper hardners: film thickness about 70-80 µ. Available colors: orange RAL 2004 and green RAL 6029.

Available Options

- PRV Pressure reducing valve (adjustable outlet pressure between 0,5 and 6 bar)
- ST CPB Strainer with stainless steel filtering mesh (filtering capacity 20 mesh)
- MIV Main isolation valve
- SSB Type 304 stainless steel bowl
- SSS Type 304 stainless steel shower head
- SSSH Type 304 stainless steel spray heads
- US Universal high visibility sign

ORDERING INFORMATION			
STD	3950400		

The data shown can not be considered binding. Continued product improvements make specifications subject to change without notice.