

High Resolution Day & Night Camera

SDC-425





Specifiche Tecniche

Modello	SDC-425N	SDC-425N	SDC-425P	SDC-425PD	SDC-425PH
Alimentazione	24V AC / 12V DC (±10%)		24V AC / 12V DC (±10%)	12V DC (±10%)	230V AC (±10%)
Assorbimento	Max. 2.5W		Max. 3.5W	Max. 2.5W	Max. 3.5W
Sensore	1/3" Super HAD CCD				
Total Pixels	811(H) x 508(V)		795(H) x 596(V)		
Effective Pixels	768(H) x 494(V)		752(H) x 582(V)		
Scanning System	2 : 1 Interlace		2 : 1 Interlace		
	525 Lines / 60 Fields / 30 Frames		625 Lines / 50 Fields / 25 Frames		
Synchronization	Internal / Line lock	Internal	Internal / Line lock	Internal	Internal / Line lock
Scanning Frequency	Horizontal : 15,734KHz / Vertical : 59.94Hz		Horizontal : 15,625KHz / Vertical : 50Hz		
Horizontal Resolution	580TV lines (Min.)				
Video Output	1.0Vp-p / 75Ω		1.0Vp-p / 75Ω		
	(Video 0.714Vp-p, Sync 0.286Vp-p)		(Video 0.7Vp-p, Sync 0.3Vp-p)		
Digital Zoom	On / Off selectable (2X ~ 10X)				
S / N Ratio (Y signal)	52dB (AGC off, Weight on)				
Min. Illumination	0.05Lux@F1.2 (Normal color mode, 50 IRE)				
	0.0002Lux@F1.2 (Sens-up mode, 50 IRE)				
Back Light Compensation	BLC / HLC / Off				
Day & Night	Color / Auto / B/W				
Gain Control	Low / High / Off				
White Balance	ATW / AWC / Manual (1,800°K ~ 10,500°K)				
Electronic Shutter Speed	Auto / Manual (1/60 ~ 1/120,000) / Flickerless		Auto / Manual (1/50 ~ 1/120,000) / Flickerless		
Sens-up (Frame Integration)	On / Off (Selectable limit ~ 256X)				
OSD	Multi-language support		Multi-language support		
	(English, Japanese, Spanish, Korean)		(English, French, German, Spanish, Italian, Chinese)		
SSNR	On / Off selectable (1 ~ 32 Level)				
Motion Detection	On / Off selectable (8 Programmable zones)				
Privacy Masking	On / Off selectable (8 Programmable zones)				
Mirror / Flip	Horizontal or Vertical selectable				
Sharpness	On / Off selectable (Level adjustable)				
Digital Image Stabilizer (DIS)	On / Off				
Iris Control	DC / Video				
Lens Mount	C / CS-mount (Easy focus type)				
Operating Temperature	-10°C ~ +50°C				
Operating Humidity	20% ~ 90% RH				
Dimensioni	58(W) x 52(H) x 121(D)mm / 2.28"(W) x 2.05"(H) x 4.76"(D)				
Peso	310g (0.68 lb)	290g (0.64 lb)	310g (0.68 lb)	290g (0.64 lb)	510g (1.12 lb)

Dimensioni

Unit : mm (inch)

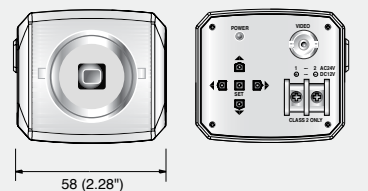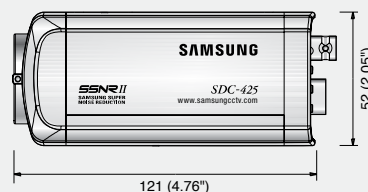

WIV



Per la prima volta ben
580 Linee TV di Risoluzione
con **0.05Lux**

High Resolution Day & Night Camera

SDC-425



immagina una Telecamera con
Immagini Chiare e Nitide, sempre

La SDC-425 è posizionata come la telecamera 'general purpose' di Samsung Techwin.
Nonostante ciò è dotata dell'avanzatissimo D.S.P. Winner IV con funzioni e prestazioni
talmente elevate che eccedono quelle dei sistemi più avanzati oggi sul mercato professionale.



The Eco mark represents Samsung Techwin's will to create environment-friendly products,
and indicates that the product satisfies the EU RoHS Directive.

Design e specifiche sono soggette a variazioni senza preavviso.



SAMSUNG TECHWIN CO., LTD.
145-3, Sangdaewon 1-dong, Jungwon-gu, Seongnam-si, Gyeonggi-do Korea 462-703
Tel : +82-31-740-8151 ~ 8 Fax : +82-31-740-8145
www.samsungcctv.com

SAMSUNG OPTO-ELECTRONICS AMERICA, LTD.
1480 Charles Willard St. Carson, CA 90746
Tel : +1-310-632-1234 Fax : +1-310-632-2195

SAMSUNG OPTO-ELECTRONICS UK, LTD.
Samsung House, 1000 Hillwood Drive,
Hillwood Business Park Chertsey, Surrey KT16 0PS
Tel : +44-1932-455312 Fax : +44-1932-455325

TIANJIN SAMSUNG OPTO-ELECTRONICS CO., LTD.
7 Pingchang Rd., Nankai Dist. Tianjin 300190, P.R. China
Tel : +86-22-2761-4724(3821) Fax : +86-22-2761-6514

■ DISTRIBUITO DA

CE FC

SAIET
TELECOMUNICAZIONI

www.saiet.it/ivs

SAMSUNG TECHWIN



Ridefiniamo che cosa aspettarsi da una telecamera general purpose...


580TV Lines con 0.05Lux
SDC-425

WIV

Digital Signal Processing found only
on Samsung Techwin cameras

Samsung Techwin's 4th generation DSP is the engine that brings out the performance of this camera. The SSNR^{II} noise reduction technology is the industry's only 3D noise filtering system. This enables the SDC-425 to have an industry-leading S/N specification of 52dB, which is a key to achieving superior low light performance as well as DVR recording efficiency.

La SDC-425 e' the next generation of Samsung Techwin's popular SDC-415. Based upon the 4th generation of digital signal processing technology, the SDC-425 has the industry's highest resolution specification for a standard definition format camera. In addition to superior resolution the WIV DSP provides for a rich set of advanced features and performance specifications that are normally found only on more expensive system cameras.

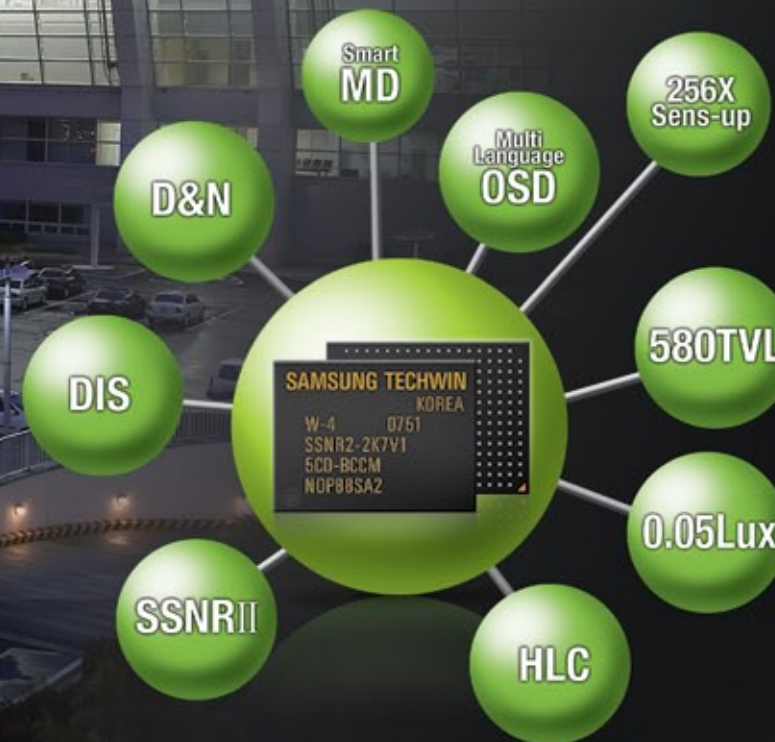


High Resolution



High quality color images of 580TV Lines

The SDC-425 delivers high quality 580TV Lines images utilizing a unique image processing technology found only in Samsung Techwin's 4th generation DSP.



Conventional Camera



SDC-425

Low Noise-High Sensitivity



The new 3D noise filter SSNR^{II} results in a minimum illumination of 0.05Lux

Managing noise is the key to achieving great results in low light. The advanced 3D noise filtering system in the SDC-425 allows it to provide good color in much lower lighting levels. Reducing noise in the picture also reduces the amount of storage space required to record the video on a DVR.



Conventional Camera



SDC-425

Highlight Compensation




Highlight Compensation HLC

The SDC-425 is equipped with HLC (Highlight Compensation) which reverses bright spots in the picture (such as headlights). This enables the entire system to do a better job of resolving and displaying grayscale information such as a license plate.



HLC Off



HLC On

Smart Extra Functions



Digital Image Stabilizer DIS

The built-in DIS (Digital Image Stabilizer) of the SDC-425 removes image jitter that is caused by vibrations in the building. This stabilization greatly reduces the amount of hard disk space required to store images on a DVR. Depending upon the amount of shake, DIS can reduce storage requirements by as much as half even in cameras with no apparent image jitter.



DIS Off



DIS On



Convenient Multi-language OSD

The SDC-425's multi-language On Screen Display improves user convenience and enables easy access to various camera functions.



Programmable Motion detection & Privacy masking

The SDC-425 comes with a programmable 8-zone motion detector built in. This motion detector uses an advanced digital processing motion algorithm to discriminate against unwanted alarms. It also has the ability to mask up to 8 areas of the picture where viewing is not desired. Each zone can be independently programmed via the OSD.



Motion Detection



Privacy Masking



Wide range White balance processing

The WIV DSP utilizes advanced digital processing to achieve white balance in a much wider range of color temperatures 1,800°K to 10,500°K.



Conventional Camera



SDC-425