



V12-1550.

Power to get your yacht up to speed.

Powered by MAN.

MAN Nutzfahrzeuge Group



Full speed ahead.

A whole fleet of MAN marine diesel engines is waiting for this command. The powerful common rail diesel engines from 730 hp to 1 800 hp impress with their extraordinary dynamics, their extreme running smoothness, economy and their trend-setting environmental friendliness. The finest from modern technology.

Engine description V12-1550.

Characteristics

| | |
|---------------------------|--|
| Cylinders and arrangement | 12 cylinders in 90° V design |
| Operation mode | 4-stroke diesel engine watercooled 2-stage exhaust turbocharging intercooler |
| Number of valves | 4 valves per cylinder |
| Fuel system | Common Rail direct fuel injection with electronic control |
| Engine lubrication | Closed system with forced feeding, oil cooling and filtering |
| Type of cooling | Heat exchanger with engine and seawater circuit |
| Engine electric | Electronic injection control (EDC) Electronic engine monitoring including diagnostic unit |
| Exhaust gas status | IMO/MARPOL 73/78, EPA Tier 2 , Recreational Craft Directive 94/25/EC, SAV, 97/68 EC |
| Fuel | DIN EN 590 |

Dimensions

| | | |
|---|----|-------|
| A-Overall width of engine | mm | 1 380 |
| B-Overall length of engine | mm | 2 025 |
| C-Overall height of engine | mm | 1 270 |
| D-Top of engine to crankshaft centre | mm | 800 |
| E-Length of engine from front end to edge of flywheel housing | mm | 1 489 |

For detailed examinations of installation dimensions, please order drawings from our factory.

MAN engines have outstanding qualities

- High tractive power even at low speeds
- Powerful acceleration and rapid reaction to commands
- High performance combined with low weight
- Compact, space-saving design
- Large operation range owing to low consumption
- Low running costs and long service life
- Low emission values
- World-wide service network with rapid supply of spare parts


Technical data

| Type of engine | | V12-1550 |
|-----------------------------------|---------|---------------|
| Displacement | l | 21.93 |
| Maximum output to DIN ISO 3046-1* | kW (hp) | 1 140 (1 550) |
| Rated speed | rpm | 2 300 |
| Maximum torque | Nm | 5 000 |
| at speed | rpm | 1 200 - 2 200 |
| Weight (dry) | kg | 2 165 |
| Fuel consumption at rated power | l/h | 307 |


* The ratings are only for operation of private yachts.

Definition of operation

The engines for light duty operation are designed for a maximum of 1 000 annual operating hours with up to 20 percent of time at full load, an average of up to 50 percent load application and no wide-open throttle below rated speed.



Power charts.

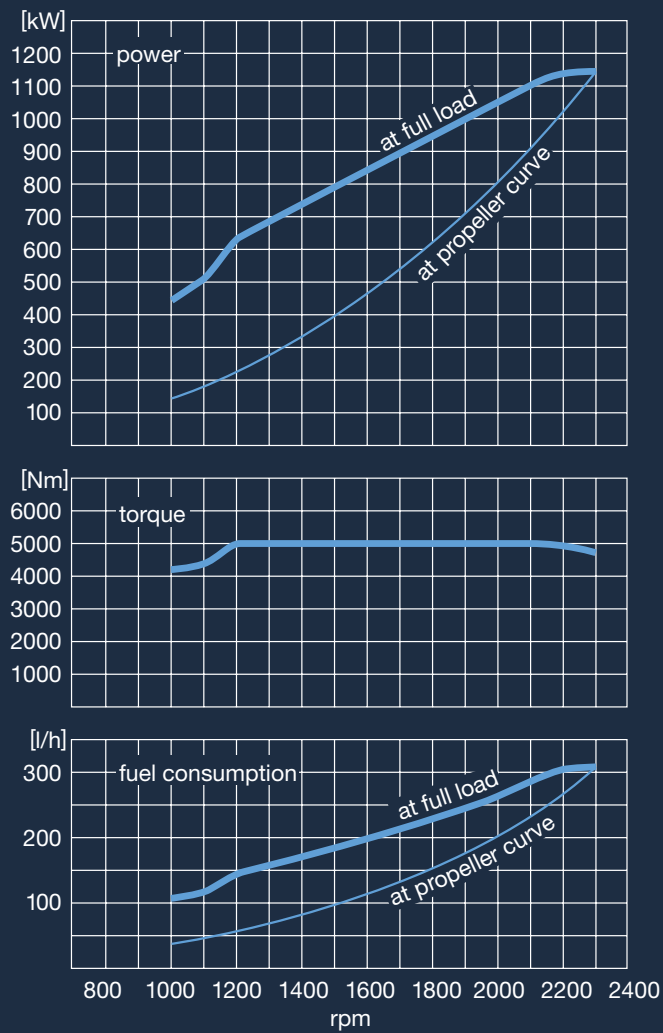

■ V12 -1550 CRM, 1,140 kW (1,550 mhp)

D 114.007/E · ms 11074 · Printed in Germany

Text and illustrations are not binding.

We reserve the right to make modifications in the course of technical progress.

MAN Nutzfahrzeuge AG
 Business Unit Engines
 Dept. MVM
 Vogelweiherstr. 33
 90441 Nuremberg, Germany

www.man-engines.com
marinemotor@de.man-mn.com

